
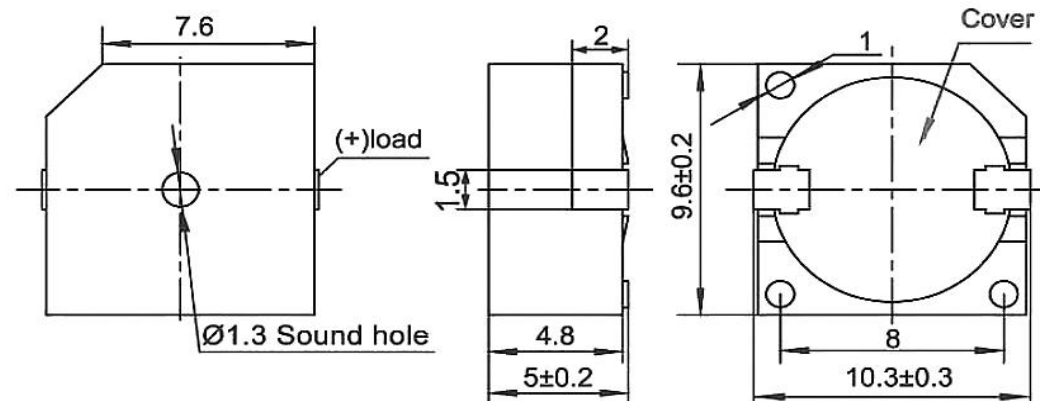
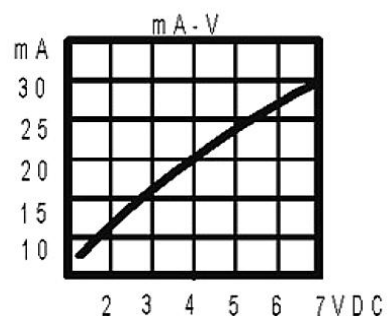
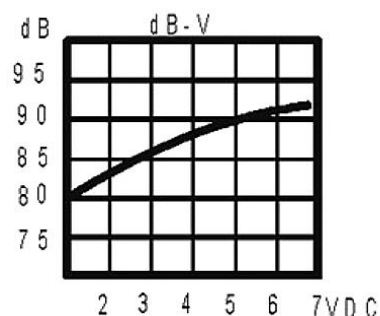


SPECIFICATION			THIS DOCUMENT CONTAINS DATE		REVISION HISTORY			
1	Model No.	EEB9650S-05L-2.7-R	PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS CHANGZHOU ESUNTECH CO LTD IS PROHIBITED. ©2003,Project Changzhou Esuntech Co Ltd		LTR	DESCRIPTION	DATE	APPROVED
2	Rated Voltage (V)	5			-	RELEASED FROM ENGINEERING	9/23/2003	Y M
3	Operating Voltage (V)	4~7			A			
4	Rated Current (mA)	≤100			B			
5	*Current Consumption (mA)	≤30			C			
6	*Sound Output at 10cm (dB)	≥80						
7	Resonance Frequency (Hz)	2700±300						
8	Coil Resistance (Ω)	40±4						
9	Operating Temperature (°C)	-20~+70						
10	Storage Temperature (°C)	-30~+80						
11	Weight (g)	1						
12	Housing Material	LCP						
13	Rohs	Yes						



NOTES:

1.ALL DIMENSIONS ARE IN MILLIMETERS

2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
A4	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn						
				EEB9650S-05L-2.7-R			
				BUZZER	Edition	Sheet	