SPECIFICATION				
1	Model No.	EET4020S-03- 4.0-12-R		
2	Rated Voltage (V)	3.6		
3	Operating Voltage (V)	2.0-4.0		
4	Rated Current (mA)	≤110		
5	Resonance Frequency (Hz)	4000 12±3		
6	Coil Resistance (Ω)			
7	Sound Output at 10cm (dB)	≥75		
8	Operating Temperature (℃)	-20∼+70		
9	Storage Temperature (℃)	-30∼+80		
10	Weight (g)	0.07		
11	Housing Material	LCP		
12	Rohs	Yes		

THIS DOCUMENT CONTAINS DATE

PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH

CO LTD. ANY USE OR REPRODUCTION, IN ANY FORM,

WITHOUT PRIOR WRITTEN PERMISSION OF

PROJECTS CHANGZHOU ESUNTECH CO LTD


IS PROHIBITED.


©2003,Proj	ect Chanc	rzhou Feu	ntech Co I	td
@ <b>2</b> 0003,1 10j	CCL Chang	gziiou Lau	IIICCII CO L	_tu

	REVISION HISTORY				
LTR	DESCRIPTION	DATE	APPROVED		
-	RELEASED FROM ENGINEERING	9/23/2003	ΥM		
Α					
В					
С					





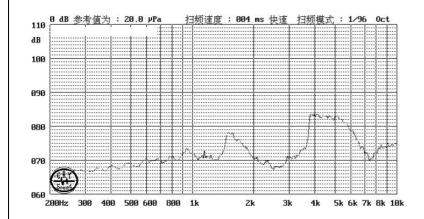

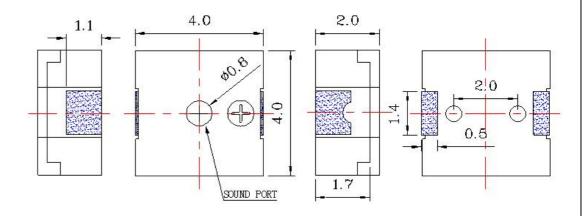

## NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
SIZE							
SIZE		70					
A4 EST			EET4020S-03-4.0-12-R				
	Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn			TRANS	SDUCER	Edition	Sheet