
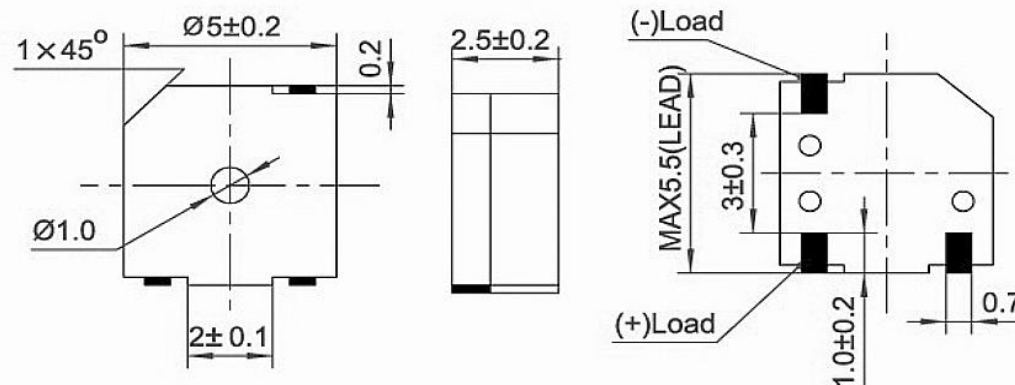


SPECIFICATION			THIS DOCUMENT CONTAINS DATE		REVISION HISTORY			
1	Model No.	EET5025AS-03L-4.0-12-R	PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS CHANGZHOU ESUNTECH CO LTD IS PROHIBITED.		LTR	DESCRIPTION	DATE	APPROVED
2	Rated Voltage (V)	3			-	RELEASED FROM ENGINEERING	9/23/2003	Y M
3	Operating Voltage (V)	2~5			A			
4	Resonant Frequency (Hz)	4000			B			
5	Coil Resistance (Ω)	12 $\pm$ 2			C			
6	*Sound Output at 10cm (dB)	$\geq$ 78	©2003,Project Changzhou Esuntech Co Ltd					
7	*Current Consumption (mA)	$\leq$ 100						
8	Operating Temperature ($^{\circ}$ C)	-20~+70						
9	Storage Temperature ($^{\circ}$ C)	-30~+80						
10	Weight (g)	0.3						
11	Housing Material	LCP						
12	Rohs	YES						

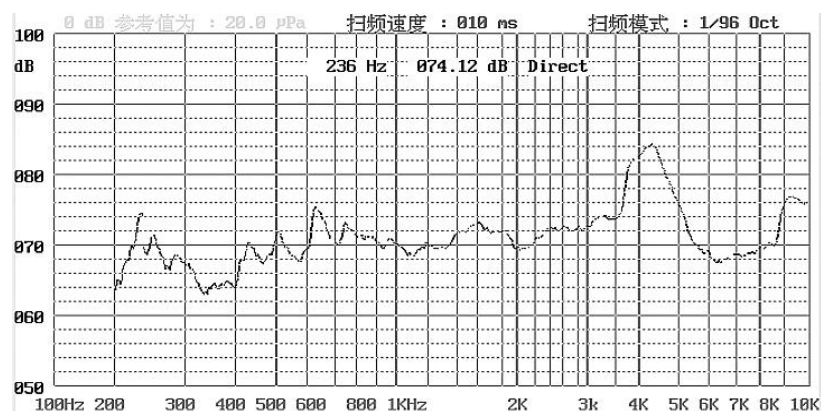

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn						
A4				EET5025AS-03L-4.0-12-R			
				TRANSDUCER	Edition	Sheet	