
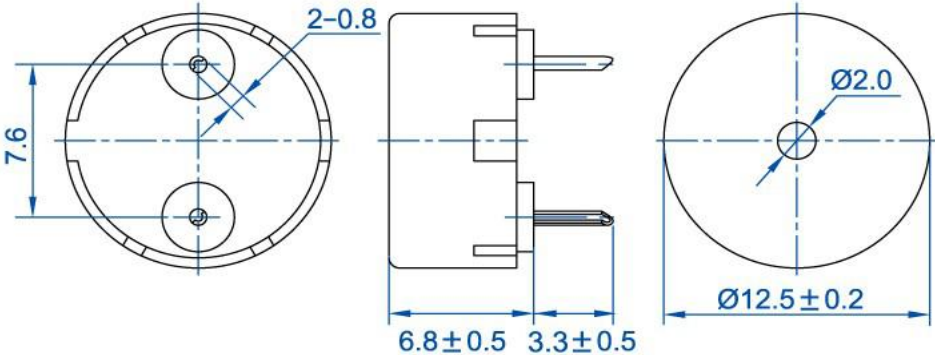


SPECIFICATION			THIS DOCUMENT CONTAINS DATE		REVISION HISTORY			
1	Model No.	EPT1360A-TO-03-4.0-12-7.6-R	PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS CHANGZHOU ESUNTECH CO LTD IS PROHIBITED. ©2003,Project Changzhou Esuntech Co Ltd		LTR	DESCRIPTION	DATE	APPROVED
2	Rated Voltage (Vp-p)	3			-	RELEASED FROM ENGINEERING	9/23/2003	Y M
3	Operating Voltage (Vp-p)	1~30			A			
4	Resonant Frequency (Hz)	4000±500			B			
5	Capacitance 120Hz (PF)	12000±30%			C			
6	*Sound Output at 10cm (dB)	≥75	 					
7	*Current Consumption (mA)	≤3						
8	Operating Temperature (°C)	-20~+70						
9	Storage Temperature (°C)	-30~+80						
10	Weight (g)	0.8						
11	RoHS	Yes						

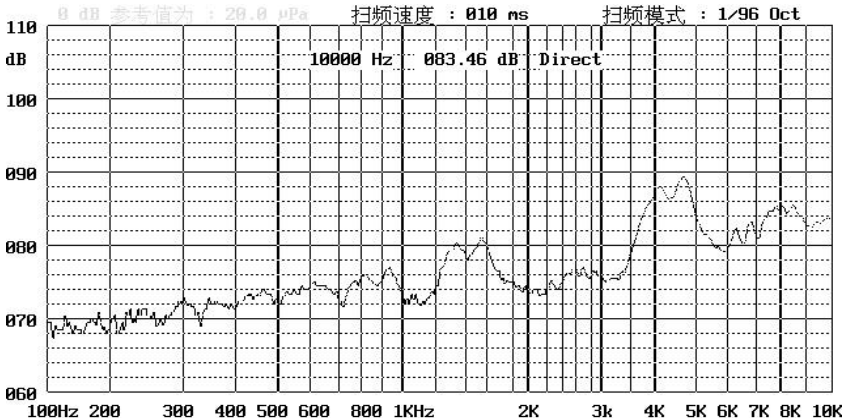

NOTES:

1.ALL DIMENSIONS ARE IN MILLIMETERS

2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn						
A4				EPT1360A-TO-03-4.0-12-7.6-R			
				TRANSDUCER	Edition	Sheet	

<http://www.esuntech.com.cn>

Email:esuntech@esuntech.com.cn

Tel:+86-519-8513 2681

Fax:+86-519-8513 2680