


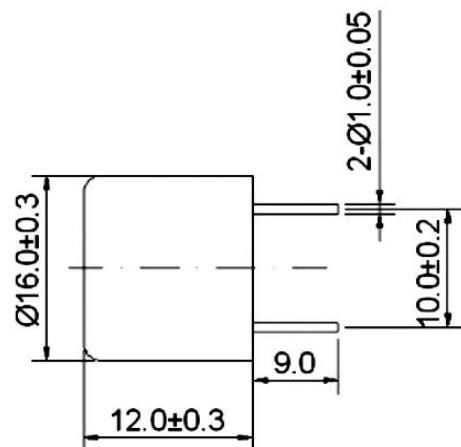



SPECIFICATION		
1	Model No.	EUS16T-40FS-WA
2	Construction	Sealed
3	Using method	Transmitter or receiver
4	Norminal Frequency	40kHz
5	SPL	≥68V/u Mbar
6	Sensitivity	≥115(10V/30cm/sine wave)
7	Directivity	80deg
8	Capacitance	2400±25%@1KHz
9	Detectable Range	18
10	Housing material	AL
11	Operating Temp.range	-20....+70
12	Weight(g)	3

THIS DOCUMENT CONTAINS DATE
 PROPRIETARY TO PROJECTS CHANGZHOU ESUNTECH
 CO LTD. ANY USE OR REPRODUCTION,IN ANY FORM,
 WITHOUT PRIOR WRITTEN PERMISSION OF
 PROJECTS CHANGZHOU ESUNTECH CO LTD
 IS PROHIBITED.
 ©2003,Project Changzhou Esuntech Co Ltd

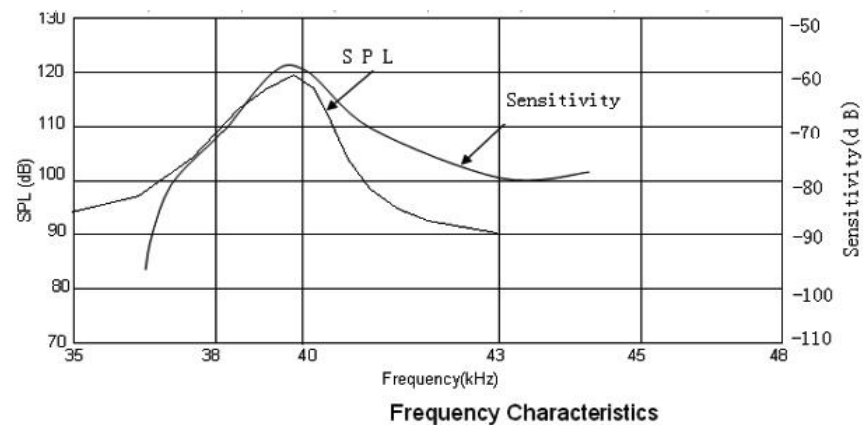

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
B			
C			

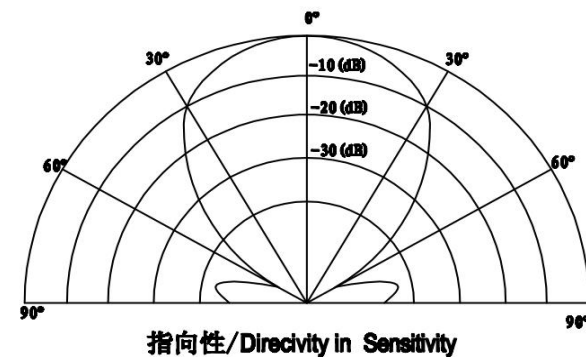

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawed date
	 Changzhou Esuntech Co.,Ltd http://www.esuntech.com.cn						
A4				EUS16T-40FS-WA			
				Ultrasonic Sensor	Edition	Sheet	